


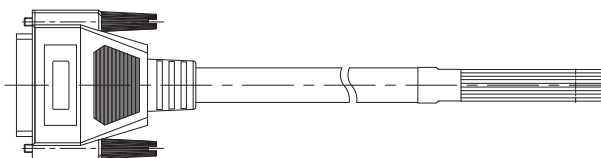


Containerized vacuum generator (multi-needle model) VKZ series

Cable order code

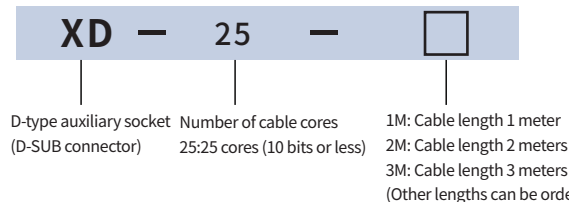

Multi-pin terminal bitmap

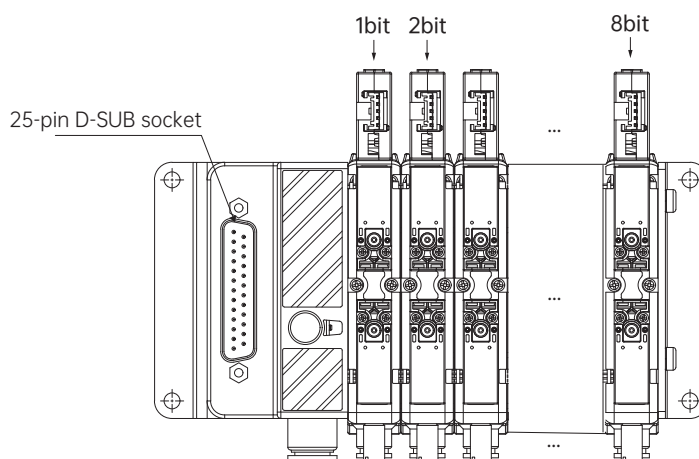

Terminal number and assembly valve wire definition			Terminal number and assembly valve wire definition		
Terminal serial number	Definition of wire	Assembly valve	Terminal serial number	Definition of wire	Assembly valve
1	1 ↔ COM(GND)	Common	14	14 ↔ 5 Vacuum	5bit
2	2 ↔ COM(GND)	Common	15	15 ↔ 5 Break through	5bit
3	3 ↔ COM(GND)	Common	16	16 ↔ 6 Vacuum	6bit
4	4 ↔ COM(GND)	Common	17	17 ↔ 6 Break through	6bit
5	5 ↔ COM(GND)	Common	18	18 ↔ 7 Vacuum	7bit
6	6 ↔ 1 Vacuum	1bit	19	19 ↔ 7 Break through	7bit
7	7 ↔ 1 Break through	1bit	20	20 ↔ 8 Vacuum	8bit
8	8 ↔ 2 Vacuum	2bit	21	21 ↔ 8 Break through	8bit
9	9 ↔ 2 Break through	2bit	22	22 ↔ 9 Vacuum	9bit
10	10 ↔ 3 Vacuum	3bit	23	23 ↔ 9 Break through	9bit
11	11 ↔ 3 Break through	3bit	24	24 ↔ 10 Vacuum	10bit
12	12 ↔ 4 Vacuum	4bit	25	25 ↔ 10 Break through	10bit
13	13 ↔ 4 Break through	4bit			

[Note] As there is only one gas supply port, it is recommended that there be no more than 8 ports