

Two - way integrated valve island X series


Cable order code

XD — 26 — 


D-type auxiliary socket
(D-SUB connector)

Number of cable cores
26:26 core
(24 coils or less)

1M: Cable length 1 meter
2M: Cable length 2 meters
3M: Cable length 3 meters
(Other lengths can be ordered according to customer requirements)

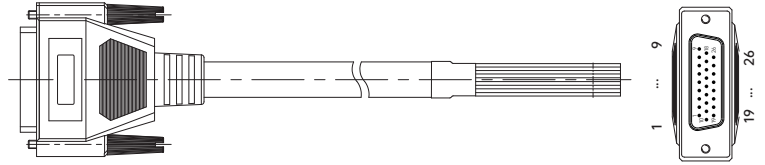

Multi-pin terminal bitmap

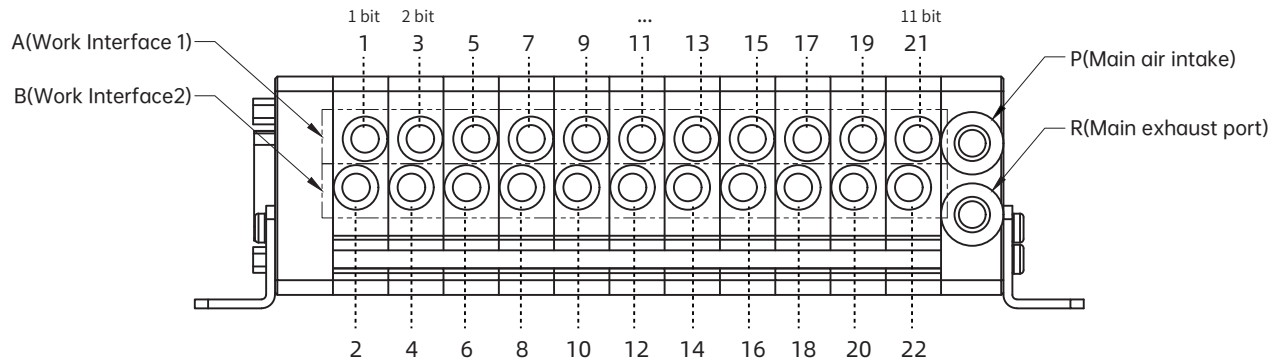

Terminal number and assembly valve wire definition			Terminal number and assembly valve wire definition		
Terminal serial number	Definition of wire	Assembly valve	Terminal serial number	Definition of wire	Assembly valve
1	1 ↔ Working port 1	1 bit	14	14 ↔ Working port 2	7 bit
2	2 ↔ Working port 2	1 bit	15	15 ↔ Working port 1	8 bit
3	3 ↔ Working port 1	2 bit	16	16 ↔ Working port 2	8 bit
4	4 ↔ Working port 2	2 bit	17	17 ↔ Working port 1	9 bit
5	5 ↔ Working port 1	3 bit	18	18 ↔ Working port 2	9 bit
6	6 ↔ Working port 2	3 bit	19	19 ↔ Working port 1	10 bit
7	7 ↔ Working port 1	4 bit	20	20 ↔ Working port 2	10 bit
8	8 ↔ Working port 2	4 bit	21	21 ↔ Working port 1	11 bit
9	9 ↔ Working port 1	5 bit	22	22 ↔ Working port 2	11 bit
10	10 ↔ Working port 2	5 bit	23	23 ↔ Working port 1	-
11	11 ↔ Working port 1	6 bit	24	24 ↔ Working port 2	-
12	12 ↔ Working port 2	6 bit	25	25 ↔ COM(GND)	Public end
13	13 ↔ Working port 1	7 bit	26	26 ↔ COM(GND)	Public end