

AFC,BFC SERIES TWO-POINT COMBINATION (FR.L COMBINATION)



AFC2000



BFC3000

Ordering Code

BFC

Model

AFC: Small Size
BFC: Middle Size

3000

Port Size

1500: G1/8"
2000: G1/4"
3000: G3/8"
4000: G1/2"


-

D

Drain Type

Blank: Differential Drain
D: Automatic Drain

Graphic Symbol




Specification

Model		AFC1500	AFC2000	BFC2000	BFC3000	BFC4000
Operating Fluid		Air				
Port Size		G1/8"	G1/4"	G1/4"	G3/8"	G1/2"
Filtering Element Roughness		40μ				
Range of Adjustable Pressure		0.05~0.85MPa				
Max. Adjustable Pressure		0.95MPa				
Ensured Pressure Resistance		1.5MPa				
Operating Temperature Range		5~60℃				
Capacity of Filter Cup		15cc		60cc		
Capacity of Oil Feed Cup		25cc		90cc		
Suggested Lube		ISO VG 32 or Same Grade Oil				
Weight		0.5 KG		0.7 KG		
Material	Body	Aluminum Die-casting Forming				
	Container Cup	PE				
	Protective Cup Cover	-		Iron		
Composing Elements	Filter & Regulator	AFR1500	AFR2000	BFR2000	BFR3000	BFR4000
	Lubricator	AL1500	AL2000	BL2000	BL3000	BL4000

AC,BC SERIES THREE-POINT COMBINATION (F.R.L COMBINATION)

Overall Dimension

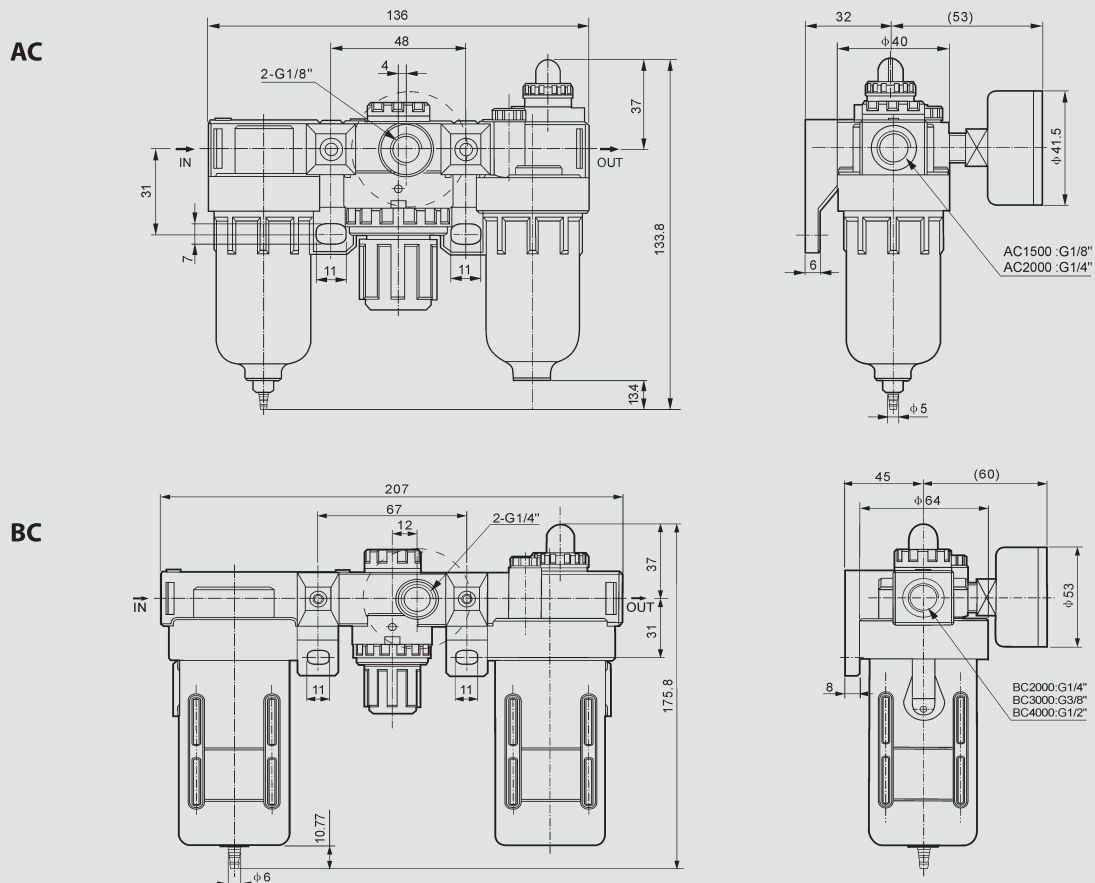

AFC,BFC SERIES TWO-POINT COMBINATION (FR.L COMBINATION)

Overall Dimension

